



N-BM70W Primary Multi Bio



Face



Finger



RFID



Inbuilt Battery



WiFi



LAN



USB



Access Control

Multi-Bio Attendance and Access Control System

Storage Capacity

Face Capacity	300
Finger Capacity	1000
Card User	300
Max User	300
Log Capacity	1,50,000

Features

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.


Output relay for door open.

Face, Fingerprint, Card, Password authentication

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.

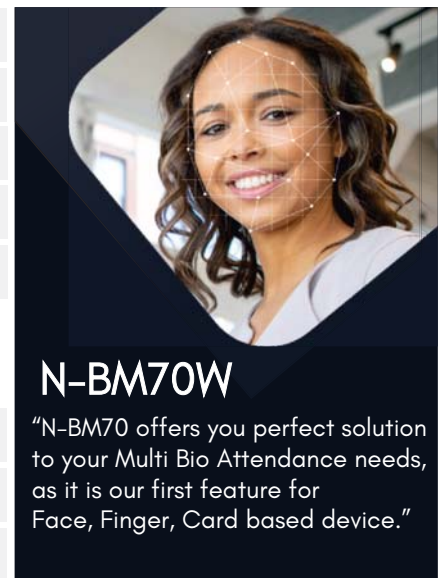

N-BM70W

"N-BM70 offers you perfect solution to your Multi Bio Attendance needs, as it is our first feature for Face, Finger, Card based device."

N-BM70W

Communication Interface

Communication	Wi-Fi, TCP/IP, USB Host
---------------	-------------------------

Biometric

Push Data	Optional
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
CPU	Industrial High Speed CPU
Verification time	<1 second
RF card options	125kHz EM (Standard) / 13.56MHz Mifare (Optional)

Audio/Visual

LCD	2.4" TFT color screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Access control

Relay	YES
Support Exit Reader	Wiegand Reader, Push Button, Remote, No Touch

Power & Environment

Inbuilt Battery Backup	YES
Power	12VDC 2Am
Operating Temperature	0°C ~ 50°C
Operating Humidity	20% - 80%
Dimension	160 x 150 x 65 mm



Auto Focus



low light Verification



Long Distance Verification



Accepts Color Finger

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Connect with us on

